

MANUFACTURER

OMI VINYL (ANHUI) Co., Ltd.

Address: Economic Development Langxi Anhui, CHINA

Tel: +86-563-7375880 Fax: +86-563-7373880

Web: www.omivinyl.com

PRODUCT DESCRIPTION

Primo Florz Spectrum 3200 is designed for use in commercial and residential applications. The Spectrum 3200 collection features a natural wood look. Its rugged construction, including a 32 mil wear layer topped with UV cured ceramic finish permits maximum durability ensuring long lasting beauty without the use of a floor finish. The composition ensures a 100% VIRGIN materials and Phthalates Free. With excellent resistance to abrasion, chipping, cracking, and permanent indentations for heavy-duty performance requirements and to help conceal most substrate irregularities, and yet it is flexible for fast and economical installations. Spectrum 3200 is the perfect choice for lobbies, office buildings, banks, healthcare, residential and commercial condominiums, or wherever both function and high design are essential. The surface includes a micro bevel smooth surface to enhance the unique look of wood, while adding slip resistance qualities to the plank. Precision cutting allows for easy installation with tight seams.

AVAILABLE STYLES (ALL DIMENSIONS NOMINAL)

Gauge: 1/8" (3 mm)

Size: 6" x 48"

Packaging: 18 pieces per carton (36 sq. /ft. per Carton)

Pallet: 60 cartons, 16 pallets on container

TECHNICAL DATA

Product Classification

ASTM F 1700 - Solid Vinyl Tile; Class III, Type B

Fire Testing Information

ASTM E 648, Critical Radiant Flux - meet or exceeds Class 1

General Performance Information

ASTM C1028-96, Static Coefficient of Friction .060 slip resistance Passes ADA/OSHA standard -

ASTM F970, Static Load - .004 inch Passes 250

ASTM F925, Resistance to Chemicals - No Change

ASTM F1514, Heat Stability of Color - $\Delta E < 8$ Avg

ASTM F1515, Light Stability of Color - $\Delta E < 8$ Avg

ASTM F1914, Residual Indentation - 3.4%

ASTM F2199, Dimensional Stability -.20" / in ft

ASTM E648 Critical Radiant Flux Class 1

ASTM E492-09 Impact Sound Conduction IIC 64db

ASTM E90-09 Airborne Sound Conduction STC 64db

ASTM F2753 Rolling load over Resilient .024 inch

2000lb PSI Rating

TECHNICAL ASSISTANCE


Please contact your local rep or call 336-781-3816

WARRANTY

Limited One (1) Year Manufacturer's Warranty

Limited Twenty (20) Year Commercial Wear Warranty

Limited Forty (40) Year Residential Wear Warranty

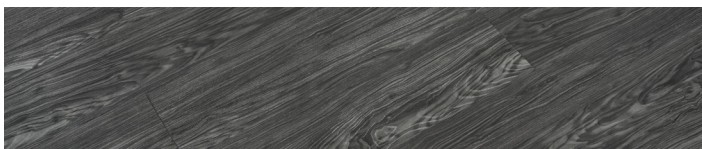

CHARCOAL OAK LVP43328G




AMERICAN CHERRY LVP43331G




NATURAL BAMBOO LVP43327G



NATURAL HICKORY LVP43329G

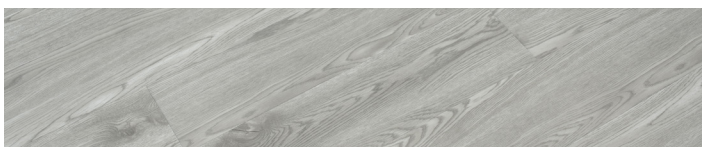

PEARL GREY OAK LVP43332G

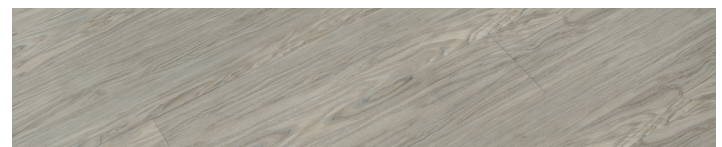

STONEHEDGE OAK LVP43330G