

MANUFACTURER


OMI VINYL (ANHUI) Co., Ltd.
Address: Economic Development Langxi Anhui, CHINA
Tel: +86-563-7375880 Fax: +86-563-7373880
Web: www.omivinyl.com

PRODUCT DESCRIPTION


Primo Florz Terra Tile is designed for use in commercial and residential applications. The Terra Tile series features texture, depth and natural beauty of real stone. Its rugged construction, includes round edge technology that can be grouted or ungrouted when installed. The 12 mil wear layer is topped with UV cured ceramic finish which permits maximum durability ensuring long lasting beauty without the use of a floor finish. The composition ensures a 100% VIRGIN and Phthalates Free material. With excellent resistance to abrasion, chipping, cracking, and permanent indentations for heavy-duty performance requirements and to help conceal most substrate irregularities, and yet it is flexible for fast and economical installations. Terra Tile is the perfect choice for lobbies, office buildings, banks, healthcare, residential and commercial condominiums, or wherever both function and high design are essential. The surface includes an embossed texture with rounded edge technology to enhance the unique look of natural stone, while adding slip resistance qualities to the tile.

AVAILABLE STYLES (ALL DIMENSIONS NOMINAL)


Gauge: 1/8" (3 mm)
Size: 18" x 18"
Packaging: 16 pieces per carton (36 sq. /ft. per Carton)
Pallet: 48 cartons, 20 pallets on container

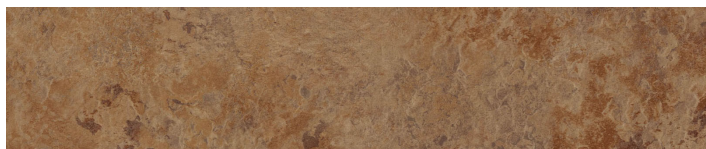

CLAY LVT13126G

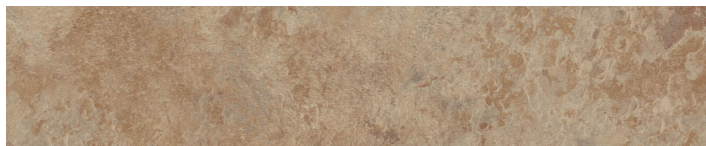

FIELD STONE LVT13125G

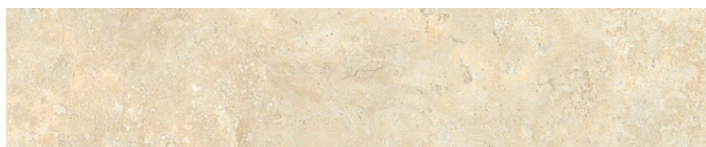

SAND BEIGE LVT13108G

TECHNICAL DATA

Product Classification

ASTM F 1700 - Solid Vinyl Tile; Class III, Type B

Fire Testing Information

ASTM E 648, Critical Radiant Flux - meet or exceeds Class 1

General Performance Information

ASTM C1028-96, Static Coefficient of Friction .060

slip resistance Passes ADA/OSHA standard -

ASTM F970, Static Load - .004 inch Passes 250

ASTM F925, Resistance to Chemicals - No Change

ASTM F1514, Heat Stability of Color - ΔE < 8 Avg

ASTM F1515, Light Stability of Color - ΔE < 8 Avg

ASTM F1914, Residual Indentation - 3.4%

ASTM F2199, Dimensional Stability -.20" / in ft

ASTM E648 Critical Radiant Flux Class 1

ASTM E492-09 Impact Sound Conduction IIC 64db

ASTM E90-09 Airborne Sound Conduction STC 64db

ASTM F2753 Rolling load over Resilient .024 inch

TECHNICAL ASSISTANCE


Please contact your local rep or call 336-781-3816

WARRANTY


Limited One (1) Year Manufacturer's Warranty

Limited Twelve (12) Year Commercial Wear Warranty


Limited Twenty five (25) Year Residential Wear Warranty

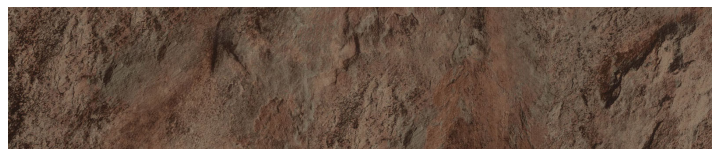

EARTH LVT13109G

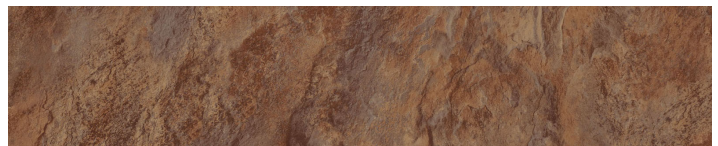

IRON OXIDE LVT13103G

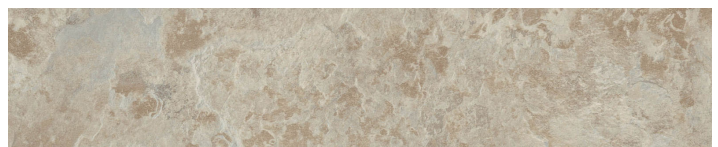

SAND STORM LVT13123G