

## MANUFACTURER

OMI VINYL (ANHUI) Co., Ltd.  
Address: Economic Development Langxi Anhui, CHINA  
Tel: +86-563-7375880 Fax: +86-563-7373880  
Web: www.omivinyl.com

## PRODUCT DESCRIPTION

Primo Florz Wilmington Series designed for use in commercial and residential applications. The Wilmington collection features a natural wood look. Its rugged construction, including a 20 mil wear layer topped with UV cured ceramic finish permits maximum durability ensuring long lasting beauty without the use of a floor finish. The composition ensures a 100% VIRGIN materials and Phthalates Free .With excellent resistance to abrasion, chipping, cracking, and permanent indentations for heavy-duty performance requirements and to help conceal most substrate irregularities, and yet it is flexible for fast and economical installations. Wilmington Series is the perfect choice for lobbies, office buildings, banks, healthcare, residential and commercial condominiums, or wherever both function and high design are essential. The surface includes a micro bevel embossed surface to enhance the unique texture of wood, while adding slip resistance qualities to the plank. Precision cutting allows for easy installation with tight seams.

## AVAILABLE STYLES (ALL DIMENSIONS NOMINAL)

Gauge: 1/8" (3 mm)  
Size: 5" x 48"  
Packaging: 20 pieces per carton (33.33 sq. /ft. per Carton)  
Pallet: 63 cartons, 16 pallets on container

## TECHNICAL DATA

### Product Classification

ASTM F 1700 - Solid Vinyl Tile; Class III, Type B

### Fire Testing Information

ASTM E 648, Critical Radiant Flux - meet or exceeds Class 1

### General Performance Information


ASTM C1028-96, Static Coefficient of Friction .060  
slip resistance Passes ADA/OSHA standard -  
ASTM F970, Static Load - .004 inch Passes 250  
ASTM F925, Resistance to Chemicals - No Change  
ASTM F1514, Heat Stability of Color -  $\Delta E < 8$  Avg  
ASTM F1515, Light Stability of Color -  $\Delta E < 8$  Avg  
ASTM F1914, Residual Indentation - 3.4%  
ASTM F2199, Dimensional Stability -.20" / in ft  
ASTM E648 Critical Radiant Flux Class 1  
ASTM E492-09 Impact Sound Conduction IIC 64db  
ASTM E90-09 Airborne Sound Conduction STC 64db  
ASTM F2753 Rolling load over Resilient .024 inch

## TECHNICAL ASSISTANCE


Please contact your local rep or call 336-781-3816

## WARRANTY


Limited One (1) Year Manufacturer's Warranty  
Limited Fifteen (15) Year Commercial Wear Warranty  
Limited Thirty (30) Year Residential Wear Warranty

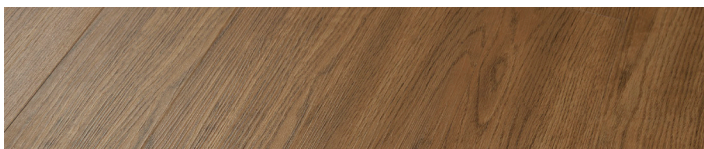


BUCKSKIN OAK LVP43221G

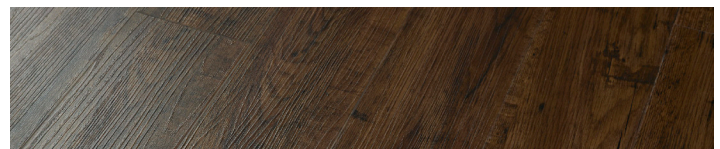


CHOCOLATE OAK LVP43208G

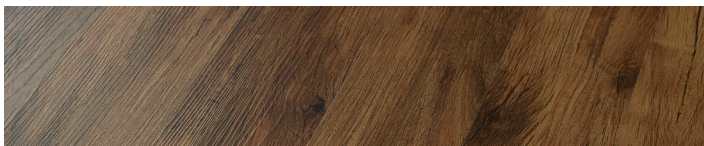


CINNAMON OAK LVP43224G

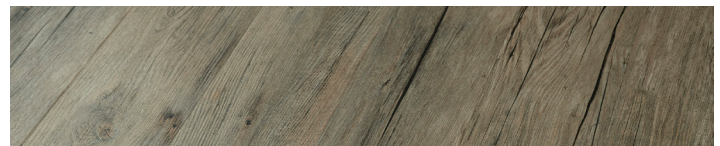

DRIFTWOOD PINE LVP43211G

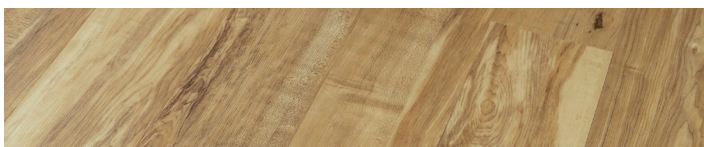

RUSTIC MAPLE LVP43217G

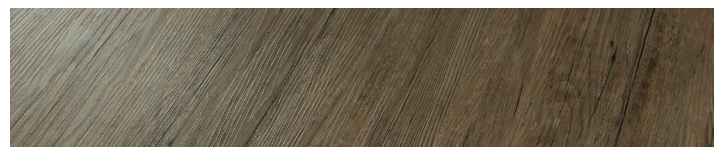

WEATHERED PINE LVP43219G