

## MANUFACTURER

OMI VINYL (ANHUI) Co., Ltd.

Address: Economic Development Langxi Anhui, CHINA

Tel: +86-563-7375880 Fax: +86-563-7373880

Web: www.omivinyl.com

## PRODUCT DESCRIPTION

Yorktown Click designed for use in commercial and residential applications. The Yorktown Click collection features a natural wood look. Its rugged construction, including a 12 mil wear layer topped with UV cured ceramic finish permits maximum durability ensuring long lasting beauty without the use of a floor finish. The composition ensures a 100% Pro-polymer Virgin PVC and Phthalates Free with fiberglass reinforced sheets. With excellent resistance to abrasion, chipping, cracking, and permanent indentations for heavy-duty performance requirements and to help conceal most substrate irregularities. Yorktown Click is the perfect choice for basements, homes, office buildings, banks, healthcare and condominiums, or wherever both function and high design are essential. The surface includes a micro bevel embossed surface to enhance the unique texture of wood, while adding slip resistance qualities to the plank. Precision cutting allows for easy Click installation with tight seams.

## AVAILABLE STYLES (ALL DIMENSIONS NOMINAL)

Gauge: 3/16" (4.2 mm)

Size: 7.09" x 48"

Packaging: 12 pieces per Carton (28.36 sq. /ft. per Carton)

Pallet: 50 cartons, 16 pallets on container

## TECHNICAL DATA

### Product Classification

ASTM F 1700 - Solid Vinyl Tile; Class III, Type B

### Fire Testing Information

ASTM E 648, Critical Radiant Flux - meet or exceeds Class 1

### General Performance Information

ASTM C1028-96, Static Coefficient of Friction .060

slip resistance Passes ADA/OSHA standard -

ASTM F970, Static Load - .004 inch Passes 250

ASTM F925, Resistance to Chemicals - No Change

ASTM F1514, Heat Stability of Color -  $\Delta E < 8$  Avg

ASTM F1515, Light Stability of Color -  $\Delta E < 8$  Avg

ASTM F1914, Residual Indentation - 3.4%

ASTM F2199, Dimensional Stability -.20" / in ft

ASTM E648 Critical Radiant Flux Class 1

ASTM E492-09 Impact Sound Conduction IIC 64db

ASTM E90-09 Airborne Sound Conduction STC 64db

ASTM F2753 Rolling load over Resilient .024 inch

## TECHNICAL ASSISTANCE


Please contact your local rep or call 336-781-3816

## WARRANTY


Limited One (1) Year Manufacturer's Warranty

Limited Twelve (12) Year Commercial Wear Warranty


Limited Twenty five (25) Year Residential Wear Warranty

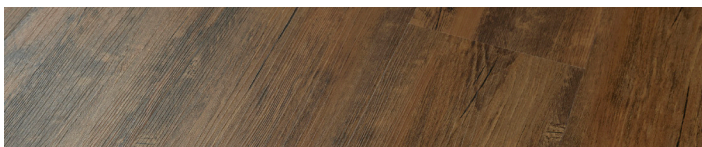


HISTORIC PINE LVP44113C

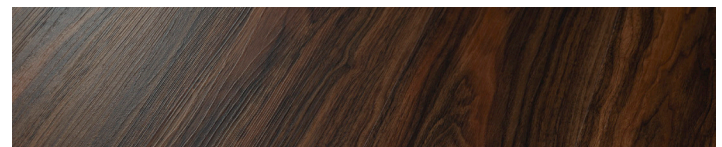


MERLOT WALNUT LVP44116C

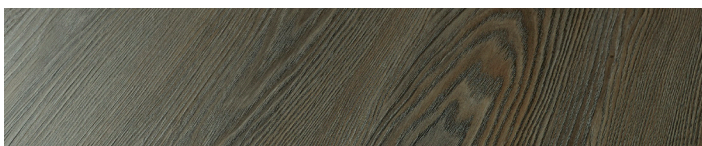


RUSTIC OAK LVP44114C

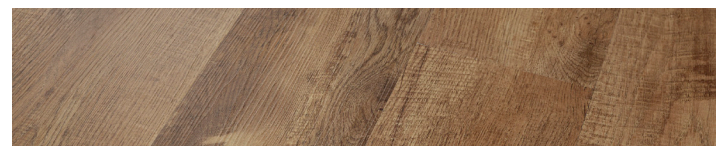

TOFFEE OAK LVP44123C

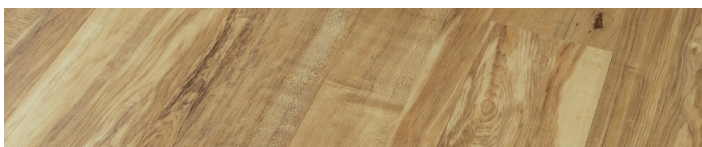

MAPLE LVP44102C

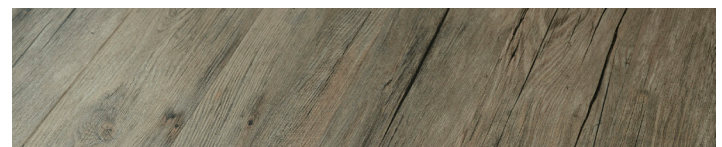

DRIFTWOOD PINE LVP44111C