

## MANUFACTURER

OMI VINYL (ANHUI) Co., Ltd.  
Address: Economic Development Langxi Anhui, CHINA  
Tel: +86-563-7375880 Fax: +86-563-7373880  
Web: www.omivinyl.com

## PRODUCT DESCRIPTION

Eureka Click is designed for use in commercial and residential applications. The Eureka Click collection features a natural wood look. Its rugged construction, including a 6 mil wear layer topped with UV cured ceramic finish permits maximum durability ensuring long lasting beauty without the use of a floor finish. The composition ensures a 100% Virgin PVC and Phthalates Free with fiberglass reinforced sheets. With excellent resistance to abrasion, chipping, cracking, and permanent indentations for heavy-duty performance requirements and to help conceal most substrate irregularities. Eureka Click is the perfect choice for basements, homes, office buildings, banks, healthcare and condominiums, or wherever both function and high design are essential. The surface includes a micro bevel embossed surface to enhance the unique texture of wood, while adding slip resistance qualities to the plank. Precision cutting allows for easy Click installation with tight seams.

## AVAILABLE STYLES (ALL DIMENSIONS NOMINAL)

Gauge: 1/8" (4 mm)  
Size: 7.09" x 48"  
Packaging: 12 pieces per carton (28.36 sq. /ft. per Carton)  
Pallet: 50 cartons, 16 pallets on container

## TECHNICAL DATA

### Product Classification

ASTM F 1700 - Solid Vinyl Tile; Class III, Type B

### Fire Testing Information

ASTM E 648, Critical Radiant Flux - meet or exceeds Class 1

### General Performance Information


ASTM C1028-96, Static Coefficient of Friction .060  
slip resistance Passes ADA/OSHA standard -  
ASTM F970, Static Load - .004 inch Passes 250  
ASTM F925, Resistance to Chemicals - No Change  
ASTM F1514, Heat Stability of Color -  $\Delta E < 8$  Avg  
ASTM F1515, Light Stability of Color -  $\Delta E < 8$  Avg  
ASTM F1914, Residual Indentation - 3.4%  
ASTM F2199, Dimensional Stability -.20" / in ft  
ASTM E648 Critical Radiant Flux Class 1  
ASTM E492-09 Impact Sound Conduction IIC 64db  
ASTM E90-09 Airborne Sound Conduction STC 64db  
ASTM F2753 Rolling load over Resilient .024 inch

## TECHNICAL ASSISTANCE


Please contact your local rep or call 336-781-3816

## WARRANTY


Limited One (1) Year Manufacturer's Warranty  
Limited Seven (7) Year Commercial Wear Warranty  
Limited Fifteen (15) Year Residential Wear Warranty

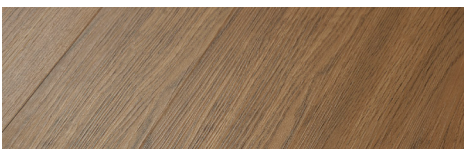


BUCKSKIN OAK LVP44621C

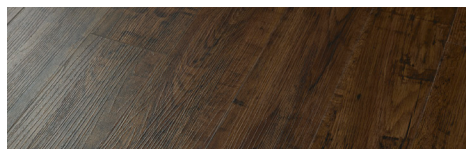

CHOCOLATE OAK LVP44608C

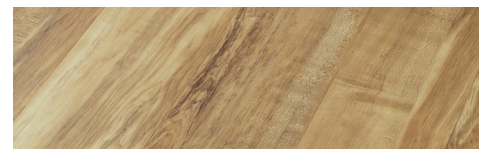

RUSTIC MAPLE LVP44617C

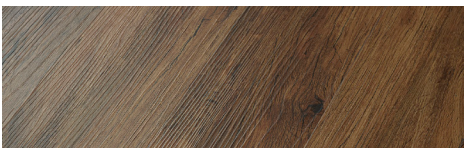

CINNAMON OAK LVP44624C



DRIFTWOOD PINE LVP44611C



WEATHERED PINE LVP44619C



FADED OAK PVC44648C



GREY OAK PVC44621C