

Yorktown Click II

Premium Vinyl Wood Plank

PRODUCT QUICK SPEC



1. MANUFACTURER

OMI VINYL(ANHUI) Co., Ltd.
Address: Economic Development Langxi Anhui,CHINA
Tel: +86-563-7375880
Fax: +86-563-7373880
Web: www.omivinyl.com

2. PRODUCT DESCRIPTION

Yorktown Click designed for use in commercial and residential applications. The Yorktown Click collection features a natural wood look. Its rugged construction, including a 12 mil wear layer topped with UV cured ceramic finish permits maximum durability ensuring long lasting beauty without the use of a floor finish. The composition ensures a 100% Pro-polymer **Virgin PVC** and **Phthalates Free** with fiberglass reinforced sheets. With excellent resistance to abrasion, chipping, cracking, and permanent indentations for heavy-duty performance requirements and to help conceal most substrate irregularities. Yorktown Click is the perfect choice for basements, homes, office, banks, healthcare and condominiums, or wherever both function and high design are essential. The surface includes an micro bevel embossed surface to enhance the unique texture of wood, while adding slip resistance qualities to the plank. Precision cutting allows for easy Click installation with tight seams.

Available Styles (All Dimensions Nominal) Gauge: 3/16" (4.2 mm)
Size: 7.09" x 48" **Packaging:** 12 pieces per Carton (28.36 sq. /ft. per Carton)

3. TECHNICAL DATA

Product Classification

ASTM F 1700 - Solid Vinyl Tile; Class III, Type B

Fire Testing Information

ASTM E 648, Critical Radiant Flux - Class 1, > .45 W/cm2

General Performance Information

ASTM C1028-96, Static Coefficient of Friction .060 slip resistance

Passes ADA/OSHA standard -

ASTM F 970, Static Load - 2,000 PSI, < .005"

ASTM F925, Resistance to Chemicals - No Change

ASTM F1514, Heat Stability of Color - $\Delta E < 8$ Avg

ASTM F1515, Light Stability of Color - $\Delta E < 8$ Avg

ASTM F1914, Residual Indentation - 3.4%

ASTM F2199, Dimensional Stability -.20" / in ft

ASTM E648 Critical Radiant Flux Class 1

ASTM F2753 Rolling load over Resilient .024 inch

4. TECHNICAL ASSISTANCE

Technical service information and assistance may be obtained
336-781-3816

5. LIMITED WARRANTY


Limited One (1) Year Manufacturer's Warranty

Limited Twelve (12) Year Commercial Wear


Warranty Limited Twenty five (25) Year Residential Wear
Warranty




Bleached Pine LVP44165C

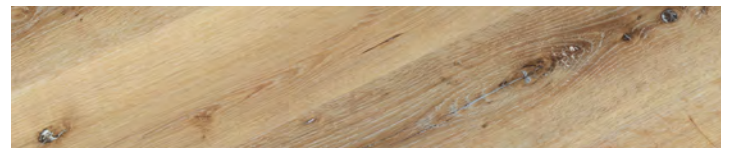


Boardwalk Oak LVP44152C

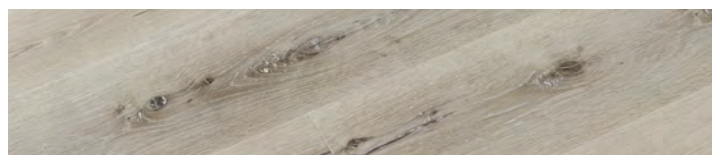


Coastal Oak LVP44153C

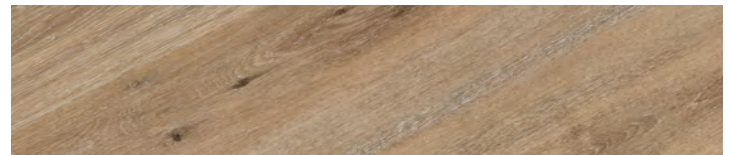

Old Towne Oak LVP44162C

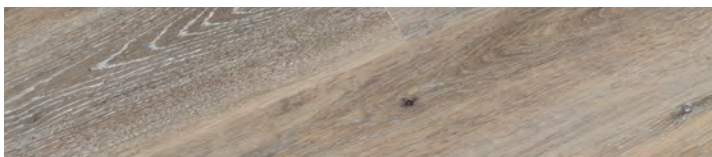

Salem Oak LVP44161C

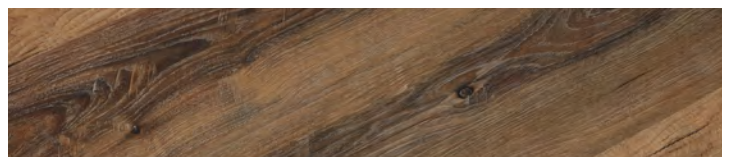

Rustic Walnut LVP44149C